

# Advanced Digital TV

## SureWest Caller ID on TV for ADTV

With SureWest's Caller ID on TV you take control of you incoming calls. Caller ID on TV lets you decide whether an incoming call will be an interruption.



## Coming June 2010

To manage your Caller ID on TV feature you will use the **Extras** tab in the main menu on your SureWest Advanced Digital TV service. The menu options in this tab will enable you to view your Caller ID history, temporarily snooze the feature for a specified period of time or completely disable the feature.

To view your Caller ID history:

1. Press the **Menu** button on your remote control.
2. Scroll to the **Extras** tab.
3. Scroll down to **Caller ID History** and press **OK** on your remote control.
4. Your Caller ID history appears on the screen, on this screen you can browse the calls to your home phone by pressing the up and down arrow keys on your remote control. Or scroll to the **Next** tab at the bottom of the screen and press the **OK** button on your remote control to scroll through multiple pages of call history.



On the Caller ID History screen you can manage your Caller ID History listing by saving or deleting records, or you can also choose to delete all records. To manage your Caller ID history listing:

1. Press the **Menu** button on your remote control.
2. Scroll to the **Extras** tab.
3. Scroll down to **Caller ID History** and press **OK** on your remote control.
4. While in the **Caller ID History** screen scroll to a record on the screen by using the arrow keys on your remote control.
5. Once you have scrolled to the record you would like to save or delete press the **OK** button on your remote control.




6. A pop-up box will appear with call record details which include the caller's name if available, the date and time of the call. Here you will have the option to **Delete Record**, **Save** or **Delete All History**. Scroll to the action you would like to select and press **OK** on your remote control. When selecting the **Delete Record**, or **Save** options no confirmation prompt will appear. When you choose the **Delete All History** option you will receive a confirmation prompt asking: **All call history will be deleted. Are you sure?** To confirm select **Yes** or **No**.

## Coming June 2010

You also have the option to **Snooze** or **Disable** your Caller ID on TV feature. The Snooze feature allows you to temporarily disable the on screen call displays for a specified number of minutes; this feature is perfect for watching movies. You may also choose to completely **Disable** the feature, if this option is selected you will not see the feature working again until you **Enable** it.

To Snooze the Caller ID on TV displays follow these easy steps:

1. Press the **Menu** button on your remote control.
2. Scroll to the **Extras** tab.
3. Scroll down to **Caller ID Snooze** and press **OK** on your remote control.
4. Using the arrow keys on your remote control, scroll to the **Minutes** box and enter the number of minutes you would like the feature to be disabled for (i.e. 30 minutes for a TV program or 120 minutes for a movie).
5. Scroll to **Snooze** and press **OK** on your remote control.
6. The Caller ID on TV displays will not appear when a call is received at your home until the specified **Snooze** period has expired. To cancel the Snooze period follow **steps 1-3**, then select the **Reset** option and press **OK** on your remote control.

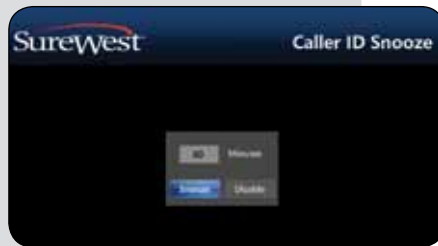

To completely Disable the Caller ID on TV feature follow these easy steps:

1. Press the **Menu** button on your remote control.
2. Scroll to the **Extras** tab.
3. Scroll down to **Caller ID Snooze** and press **OK** on your remote control.
4. Scroll to the **Disable** option and press **OK** on your remote control.
5. The feature will now be disabled until you choose to **Enable** the feature. To **Enable** the Caller ID on TV displays **repeat steps 1-3**, press **OK** while the **Enable** option is highlighted.